

## AIRPLANE USE:

**FOR INFLIGHT USE ONLY, not to be used during take-off, taxi landing, or turbulence. Maximum weight 25 lbs. Maximum height; see label on front of FlyeBaby seat for height marker, child's head should not exceed this height marker.**


Step 1: Unfold FlyeBaby seat; position it over your knees, harness side down. (Tie strings should be in the direction of your chest, not your feet.) Release tray table, secure and tighten horizontal strap around top of tray table.

Step 2: Secure and tighten two vertical straps around tray table.

Step 3: Return tray table to upright position and secure latch. (Tuck tie strings and excess strapping away from child's reach.)

Step 4: Buckle and tighten bottom strap around adult's waist.

Step 5: Test FlyeBaby seat to make sure it is secure (DO NOT use if it is not secure). Place child in shoulder harness, secure buckles & adjust straps for a secure fit.

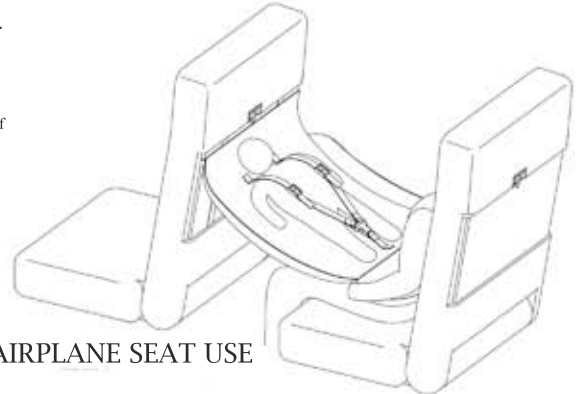

AIRPLANE SEAT USE

## HIGH CHAIR USE: Maximum weight 25 lbs

This should only be used for babies able to hold their head up and sit up unassisted.

Step 1: Secure and tighten the horizontal strap around the back of the chair.

Step 2: Depending on the type of chair, you may or may not use the vertical straps. These straps are not necessary to secure the seat but provide additional security if they can be used. (If you do not use these straps tuck them behind the seat so that they are not accessible to the child.)

Step 3: Depending on the type of chair, you may or may not use the tie strings located at the top of FlyeBaby. The tie strings are not necessary but provide additional security if they can be used. (If you do not use the tie strings tuck them behind the seat so that they are not accessible to the child.)

Step 4: Buckle and tighten the bottom strap underneath the seat of the chair.

Step 5: Test FlyeBaby to make sure it is secure (DO NOT use if it is not secure), then place child in the shoulder harness, buckle and adjust straps to make sure child is secure.



HIGH CHAIR USE

## LOUNGE CHAIR USE: Maximum weight 25 lbs

Step 1: Secure and tighten the horizontal strap around the back of the chair.

Step 2: Depending on the type of chair either secure the vertical straps located on the back of FlyeBaby, the tie strings located at the top of FlyeBaby, or use both. You must use one of these methods or DO NOT continue and DO NOT use the product. (Tuck the unused tie strings or the unused vertical straps behind the seat so that they are out of the child's reach.)

Step 3: Buckle and tighten the bottom strap underneath the arms of the chair.

Step 4: Use the additional strap located in the FlyeBaby fabric storage bag to secure the recline/adjust bar to the base of the lounge chair. To secure the recline/adjust bar wrap the additional strap around the recline/adjust bar and the base of the chair on the back of the lounge chair. This is needed to prevent the back of the lounge chair from collapsing. **DO NOT PROCEED UNTIL THIS STEP IS COMPLETE.**

Step 5: Test FlyeBaby to make sure it is secure (DO NOT use if it is not secure), then place child in the shoulder harness, buckle and adjust straps to make sure child is secure.



LOUNGE CHAIR USE